




# ACRUX GAC

## Filtration Media

*Acrux GAC is a high activity granular activated carbon obtained from bituminous, anthracite coal and is thermally activated by steam to gain a large surface area and high gas removal capacity. Acrux GAC has an enhanced pore structure that provides an outstanding performance in water treatment and food decolorization applications, as well as a great adsorption capacity for mid-to-high molecular weight compounds, such as hydrocarbons, toluene, terpenes and other VOC's.*

**Removal Capacity of Pollutants (%)**

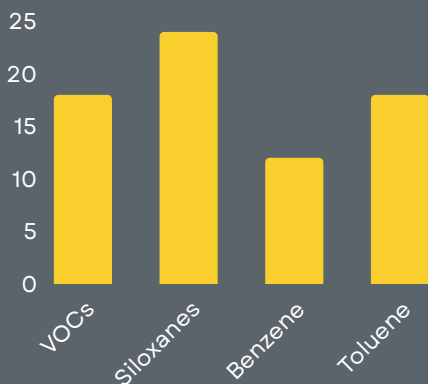

### Specifications

Properties	Value	Units	Value	Units
Apparent density	0.45±0.05	g/cm <sup>3</sup>	0.016±0.02	lb/ft <sup>3</sup>
Iodine options	700-1100	Mg/g		
Surface area	1052	m <sup>2</sup> /g	5136	ft <sup>2</sup> /lb
Mesh options	4x8, 8x30, 8x16, 12x40, 30x60, 20x50, 80x150			
Crush strength	> 98 %			
Moisture content	< 4%			
Ash options	8, 12, 15 %			
PH options	8-11 adjustable			

### Operating Conditions

Parameter	Value (metric)	Value (British)
Temperature	<50 C	< 122 F
Relative Humidity	<50 %	
Efficiency	99% min	
Storage	5-30 C	41-86 F
Shelf life	2 years	

### Packaging Options

Big bags	550kg	1100 lb
Small bags	25kg	55 lb



✉ [jv@vel-international.com](mailto:jv@vel-international.com)

🌐 [vel-international.com](http://vel-international.com)

☎ +1 832.314.8905

📍 Venice, FL